

Position 1

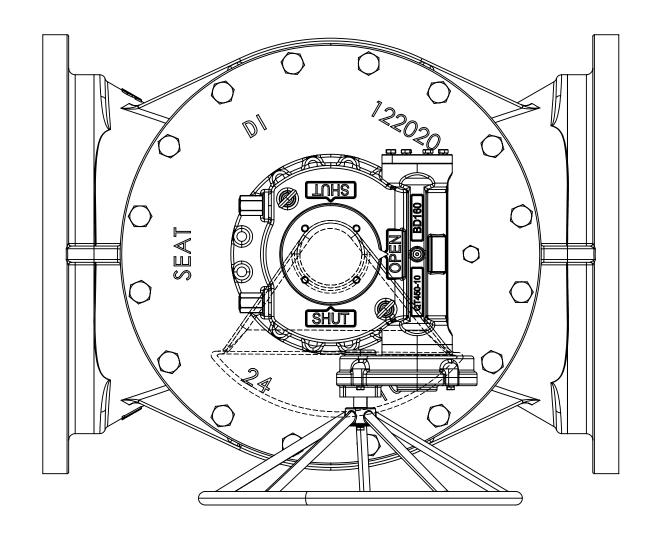


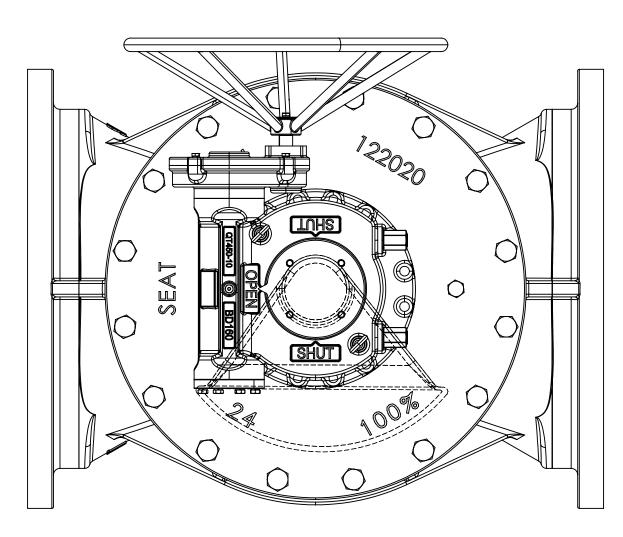


Position 3

Position 2

3

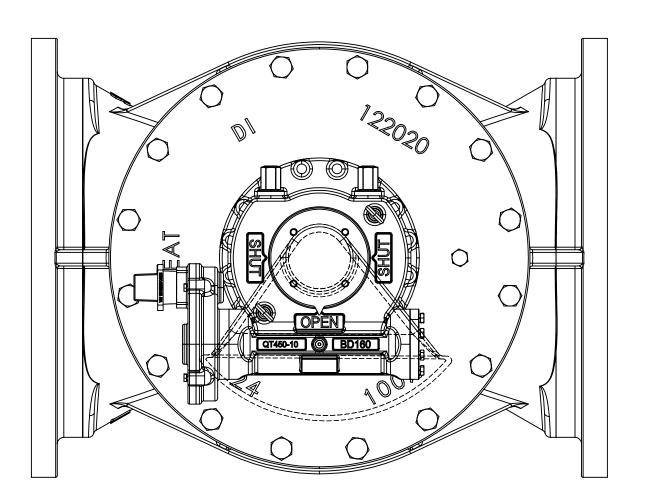

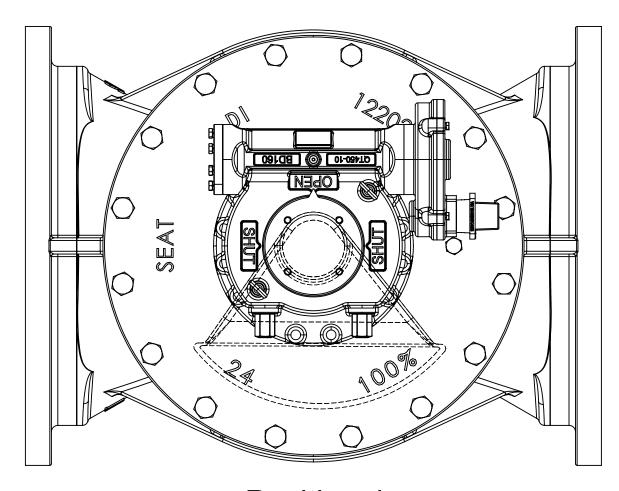


Position 4



TMJ

Notes:



- Symbol denotes plug position when valve is fully open.

7

- Nut Operator (depicted) or smaller handwheel required for two inline shaft positions (2 & 4)

6


- MJ and Flanged connections follow same mounting positions.

- Position 1 is standard and all other configurations must be requested upon order

5

MATERIAL: FINISH:

4



GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED: X.X ± 0.03 X.XX ± 0.01 X.XXX ± 0.005

2

THIS DRAWING REPRESENTS PROPRIETARY DESIGN INFORMATION, ORIGINATED BY VSI WATERWORKS FOR IT OR ITS CLIENT. THIS DRAWING IS CONFIDENTIAL. DO NOT DISTRIBUTE WITHOUT THE WRITTEN CONSENT OF VSI WATERWORKS

6/5/2023

SHEET 1 OF 1